


## Pufferspeicher mit 1 Wärmetauscher

### PSR 500 – 5000 Liter

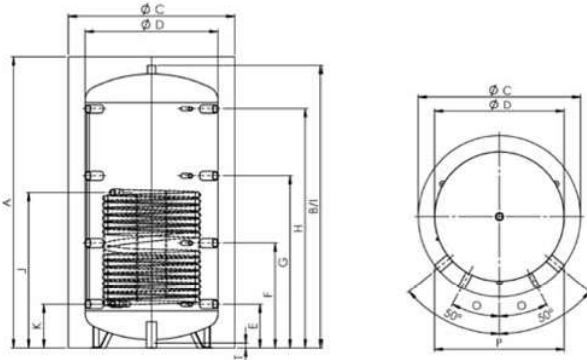

Verwendung	Dimension	500	600	800	1000	1250	1500	2000	2500	3000	4000	5000
Bruttoinhalt	Liter	480	560	718	887	1266	1500	2021	2304	2852	3759	5003
Nettoinhalt	Liter	461	545	694	861	1240	1470	1986	2249	2817	3715	4952
Register	m <sup>2</sup>	2.3	1.8	2.8	3.1	3.1	3.6	4.2	4.2	4.2	5.4	6.1
Inhalt Register	Liter	15.1	11.8	18.3	20.3	20.3	23.6	27.5	27.5	27.5	35.3	39.9
Kippmass	mm	1665	1690	1740	2085	2070	2195	2420	2395	2780	2935	3035
P Einbringmass Muffenlänge 100 mm	mm	690	740	800	800	950	1000	1100	1250	1250	1400	1600
	130 mm	740	780	840	840	970	1010	1100	1250	1250	1400	1600
	160 mm	780	820	890	890	1100	1050	1130	1250	1250	1400	1600
A Höhe	mit Isol. - mm	1680	1700	1740	2090	2060	2200	2420	2330	2770	2885	2920
	ohne Isol. - mm	1630	1650	1690	2040	2010	2150	2370	2280	2720	2835	2870
C Durchmesser	mit Isol. - mm	850	900	990	990	1150	1200	1300	1450	1450	1600	1800
	ohne Isol. - mm	650	700	790	790	950	1000	1100	1250	1250	1400	1600
E Anschluss 1	Höhe - mm	220	230	260	310	310	380	320	535	380	505	400
	Anschluss - R"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	2"	2"	2"	2"
	Fühler - R"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"
F Anschluss 2*	Höhe - mm	620	610	630	745	745	825	900	975	1020	1110	1100
	Anschluss - R"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	2"	2"	2"	2"
	Fühler - R"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"
G Anschluss 3	Höhe - mm	1010	990	1030	1250	1250	1350	1490	1415	1680	1860	1810
	Anschluss - R"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	2"	2"	2"	2"
	Fühler - R"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"
H Anschluss 4	Höhe - mm	1390	1380	1430	1710	1710	1760	2020	1855	2330	2410	2520
	Anschluss - R"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	2"	2"	2"	2"
	Fühler - R"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"
I Anschluss oben	Höhe - mm	1630	1650	1690	2040	2010	2150	2370	2280	2720	2835	2870
	Anschluss - R"	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/4"
J VL Register	Höhe - mm	1120	790	930	1030	1015	1180	1120	1250	1430	1555	1580
	Anschluss - R"	1"	1"	1"	1"	1"	1"	1"	1"	1"	1"	1"
K RL Register	Höhe - mm	220	250	260	310	300	380	320	535	480	505	580
	Anschluss - R"	1"	1"	1"	1"	1"	1"	1"	1"	1"	1"	1"
T Bodenmuffe	Höhe - mm	-	-	-	-	-	-	-	110	100	75	50
	Anschluss - R"	-	-	-	-	-	-	-	1 1/4"	1 1/4"	1 1/4"	1 1/4"
O Anordnung Fühler VL, RL Register	°	23.5	28.0	28.0	28.0	32.0	33.0	34.5	36.0	36.0	37.5	39.0
Gewicht	kg	113	111	138	157	204	222	264	303	350	446	523
Art.Nr.		PSR 500	PSR 600	PSR 800	PSR 1000	PSR 1250	PSR 1500	PSR 2000	PSR 2500	PSR 3000	PSR 4000	PSR 5000
Isolierung		100 mm Vlies										
Gewicht	kg	20	23	28	35	40	43	45	50	58	64	71
Art.Nr.		VPS 500 S 100	VPS 600 S 100	VPS 800 S 100	VPS 1000 S 100	VPS 1250 S 100	VPS 1500 S 100	VPS 2000 S 100	VPS 2500 S 100	VPS 3000 S 100	VPS 4000 S 100	VPS 5000 S 100
*ESH (Elektroheizung)	bis kW	6.0	7.5	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0