


Verlegeanleitung



megaloc aqua protect ohne integrierte Trittschalldämmung

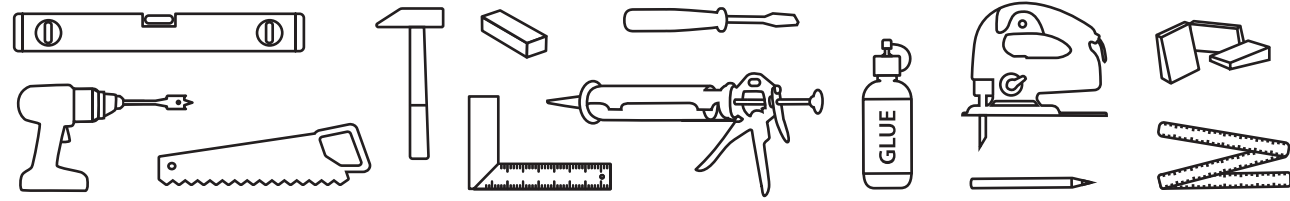

Rev. 7.2 / 08.21

1 rel. hum. 40-60%
temp. >18°C/64°F
48 h
≥ 30 cm
12 in

2 CA 0,3 CM % CT 1,8 CM %

3

4

5

6 max. 2 mm / 1 m
3/64 in / 3 ft

7 max. 3 mm, 1/8 in
0,2 mm PE

8 2 cm
25/32 in
20 cm
7 7/8 in

9 x=10 mm
3/8 in

10 max. 29°C
84°F

11

12

13 rel. hum. 40-60%
temp. >18°C/64°F

14

15 > 8 cm
3 1/8 in
11 m
36 ft
x=10 mm
3/8 in

16

17 1
2
3
∠ 20-30°

18

19

20

21 > 30 cm
12 in

22 ø+20 mm
3/4 in

23 ø+20 mm
3/4 in

24 V1 > 8 cm
3 1/8 in

25 V1

26 V1

24 V2 10 mm
3/8 in

25 V2 +10 mm
3/8 in

26 V2 > 8 cm
3 1/8 in

27

28

29 1, 2, 3

1: PE foam baker rod / PE Schaum Band, 2: Silicone / Silikon, 3: Molding / Leiste

30

31

32

33

34

35 1, 2, 3